

BENECOR



BENECOR “SMART START” TOTE-MOUNTED PUMP PACKAGE

Only Benecor gives you “Smart Start” technology. Our Smart Start Tote and Barrel Pump Package allows for minimal user interface. Simply squeeze the nozzle and the pump automatically starts and shuts-off 12 seconds after the fill is complete. With Smart Start, you can eliminate damage to your pumps seals; protect your warranty and DEF quality; avoid costly downtime; and keep control of your DEF investment in your hands - not in the hands at the pump.

Features:

- Stainless Steel Pump & Nozzle Mount
- Benecor 1/2 hp Centrifugal Pump
- Automatic Stainless Steel Nozzle with Swivel
- Delivery Hose - Benecor DEF 10 ft, Optional Lengths Available
- Suction Hose - 4 ft
- All Necessary Hose Hardware

Contact Benecor Customer Service
For Product & Pricing Information At:

248.437.4437

Technical Specifications:

- Pump
- 1/2 HP
- Voltage 115v/230v
- RPM – 3400

Models:

- Tote Mount – CTB10
- Barrel Mount – CBB10
- Wall Mount – CWB10

BENECOR



BENECOR “AUTO-OFF” TOTE-MOUNTED PUMP PACKAGE

Benecor’s “Auto-Off” Tote & Barrel Pump Packages deliver the ultimate in flexibility. An original Benecor design, these pump packages allow you to choose between mounting directly onto a tote with the front mounting design wall mounting or barrel top mounting. Paired with the durable, high-quality products you’ve come to expect from Benecor, these Pump Packages are a smart solution built to suit your DEF dispensing needs.

Features:

- Stainless Steel Pump & Nozzle Mount
- Benecor 1/2 HP DEF Pump
- Automatic Stainless Steel Nozzle with Swivel
- Delivery Hose – Benecor DEF 10 ft.; Optional lengths available
- Suction Hose – 4 ft.
- All Necessary Hose Hardware
- Benecor Flow Meter Optional

Contact Benecor Customer Service
For Product & Pricing Information At:

248.437.4437

Technical Specifications:

- Pump
- 1/2 HP
- Voltage 115v/230v
- RPM – 3400

Models:

- Tote Mount – CTB10
- Barrel Mount – CBB10
- Wall Mount – CWB10

BENECOR




BENECOR DEF 1/3 HP PUMP

As with every Benecor product, our DEF 1/3 hp Pump is designed and built to deliver on both durability and superiority. Our DEF Self-Priming Centrifugal Pump provides excellent suction capacity even when there are air bubbles in the liquid. Paired with the durable, high-quality products you've come to expect from Benecor, this pump is a smart solution built to suit your DEF dispensing needs.

Features:

- Pump: Jet R 90 GAS Viton 115v/60Hz
- Pump Body: PPO – Polypropylene
- Pump Seal: Viton Pump body O-Ring and Mechanical Seal
- Ports: 1" Male GAS suction and discharge
- Motor/Fan Cover: Black in Color (Shroud)
- Wiring: 115/60Hz w. Nema 5-15 Plug (6 foot)
- Switch: Standard On/Off

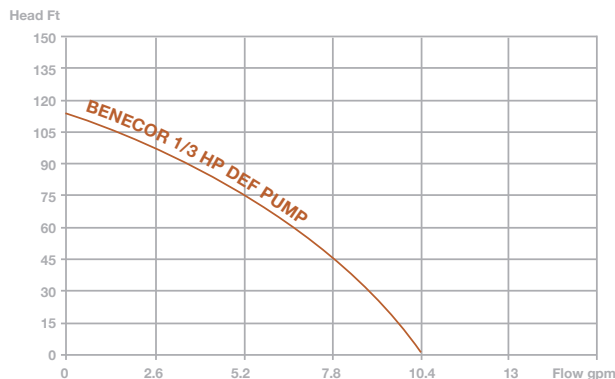

Technical Specifications:

- 1" GAS connections
- Liquid quality requirements: clean, free from solid or abrasive substances.
- Liquid temperature range: from +32° F to +113° F
- Maximum ambient temperature: +104° F
- Maximum operating pressure: 8 bar (116 PSI)
- Installation: fixed in a horizontal position.
- Motor protection level: IP44
- Terminal box protection: IP55
- Overload protections: built-in thermal and current overload protection.

Contact Benecor Customer Service
For Product & Pricing Information At:
248.437.4437

BENECOR



BENECOR DEF 12 VOLT PUMP

Only Benecor offers a 12 Volt Pump delivering the ultimate in quality, flexibility and powerful flow rates. Ideal for agricultural, construction and in-field transfer applications. Choose the mounting design that best meets your needs: front mounting design to fit directly onto a tote, wall mounting or barrel top mounting. Every component of Benecor's 12 Volt Pump Package is inspected, stamped and shipped from our own factory ensuring the highest-quality and exclusive technologies for your DEF dispensing needs.

Features:

- Stainless Steel Pump & Nozzle Mount
- Benecor 12 VDC Positive Displacement Pump
- 12' Power Cord with In-line Fuse and Battery Clips
- Automatic Stainless Steely Nozzle with Swivel
- Delivery Hose - Benecor DEF 10 ft, Optional lengths available
- Suction Hose - 4 ft
- All Necessary Hose Hardware
- Benecor Flow Meter Optional

Technical Specifications:

- 12 VDC PUmp with Integral Thermal Breaker
- Self Priming
- Viton Seals
- Flow Rate 6.5-7.5 GPM

Contact Benecor Customer Service
For Product & Pricing Information At:
248.437.4437