

# BENECOR




## BENECOR DEF 1/3 HP PUMP

As with every Benecor product, our DEF 1/3 hp Pump is designed and built to deliver on both durability and superiority. Our DEF Self-Priming Centrifugal Pump provides excellent suction capacity even when there are air bubbles in the liquid. Paired with the durable, high-quality products you've come to expect from Benecor, this pump is a smart solution built to suit your DEF dispensing needs.

### Features:

- Pump: Jet R 90 GAS Viton 115v/60Hz
- Pump Body: PPO – Polypropylene
- Pump Seal: Viton Pump body O-Ring and Mechanical Seal
- Ports: 1" Male GAS suction and discharge
- Motor/Fan Cover: Black in Color (Shroud)
- Wiring: 115/60Hz w. Nema 5-15 Plug ( 6 foot )
- Switch: Standard On/Off

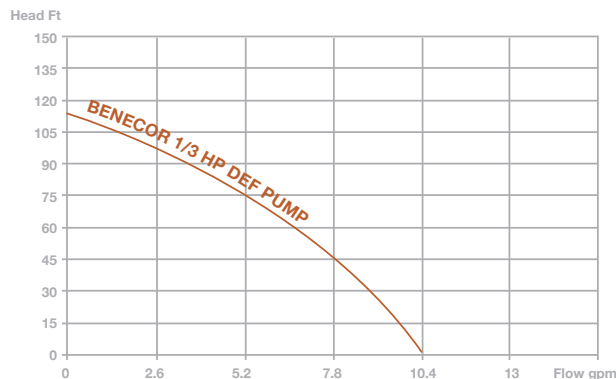

### Technical Specifications:

- 1" GAS connections
- Liquid quality requirements: clean, free from solid or abrasive substances.
- Liquid temperature range: from +32° F to +113° F
- Maximum ambient temperature: +104° F
- Maximum operating pressure: 8 bar (116 PSI)
- Installation: fixed in a horizontal position.
- Motor protection level: IP44
- Terminal box protection: IP55
- Overload protections: built-in thermal and current overload protection.

Contact Benecor Customer Service  
For Product & Pricing Information At:  
**248.437.4437**